

D Montageanleitung

Satelliten-Einbau-Receiver SER 300 Bestellnummer G.AE 3700

für TV-Chassis Digi Basic 3

bestehend aus:	SAT-Baustein	29504 222 0100
	6-poliges Kabel	29210 236 0501
	3-poliges Kabel	29210 233 7201
	Montageanleitung	72010 023 8000
	Bedienungsanleitung	28017 942 0700
	Abdeckung SAT	29700 645 2201
	Klebestreifen	29638 333 0101

Achtung: MOS-Vorschriften beachten 

Montage:

- Netzstecker ziehen
- Gehäuserückwand lösen und nach hinten ziehen, Stecker des Subwoofers von "Click Fit"-Platte abziehen (optional), Rückwand abnehmen
- Schrauben links/rechts vom Chassis herauserschrauben und Chassis nach hinten ziehen
- Haltebügel lösen
- Abdeckung abnehmen:
 - Seitlichen Rasthaken (A) am Chassisrahmen lösen (Fig.1), Rastnasen (B) austrasten und Abdeckung seitlich wegklappen
- 2 Rastnasen des NF-Bausteins an der Chassisunterseite zusammendrücken und NF-Baustein herausziehen
- Massering vom Tunereingang des ZF-Bausteins abziehen
- 2 Rastnasen des ZF-Bausteins an der Chassisunterseite zusammendrücken und ZF-Baustein herausziehen
- Beigelegte Klebestreifen auf Tuner und Elko des SAT-Bausteins kleben (Zeichnung)
- SAT-Baustein auf Steckerleiste zwischen NF- und ZF-Verstärker stecken, eventuell eingebautes Signal-Modul mit Splitter muß herausgenommen werden
- Stecker ST-AUX 1 vom NF-Baustein abziehen und auf SAT-Baustein ST-AUX 1A (rot) stecken (nur bei Geräten mit VGA-Schnittstelle)
- Beigelegtes 3-poliges Kabel auf SAT-Baustein (ST-AUX 1B) und NF-Baustein (ST-AUX 1) stecken (nur bei Geräten mit VGA-Schnittstelle)
- Beigelegtes 6-poliges Kabel auf SAT-Baustein (ST-I2 S1) und NF-Baustein (ST-I2 S1) stecken
- ZF-Baustein wieder einstecken oder zweiten SAT-Baustein anstelle des ZF-Bausteins einstecken, Massering über Tunereingang schieben (die zwei beigelegten Kabel werden nicht benötigt)
- NF-Baustein einstecken
- Haltebügel einrasten (auf Kabelverlegung achten)
- Abdeckung SAT in den Durchbruch der Abdeckung einsetzen (nur bei Geräten mit Signal-Modul mit Splitter)
- Aus Abdeckung Durchbruch (C) für SAT-Eingang ausbrechen (Fig.1)
- Bei Geräten mit zwei SAT-Bausteinen aus Abdeckung Durchbruch (D) für den zweiten SAT-Eingang ausbrechen
- Abdeckung aufsetzen und einrasten
- Chassis einschieben und mit den 2 Schrauben (links/rechts) festschrauben
- Stecker des Subwoofers auf "Click Fit"-Platte stecken (optional) und Gehäuserückwand aufsetzen
- Gerät schließen

Netzstecker einstecken und Gerät einschalten

Gerät startet mit ATS-Reset

Sprache / Land auswählen, nach Bestätigung des Landes startet der Suchlauf automatisch

GB Fitting Instructions

Built-in Satellite Receiver SER 300 Order Number G.AE 3700

for Digi Basic 3 TV chassis

consisting of:	SAT Module	29504 222 0100
	Connecting Cable, 6-core	29210 236 0501
	Connecting Cable, 3-core	29210 233 7201
	Fitting Instructions	72010 023 8000
	Operating Instructions	28017 942 0700
	SAT Cover	29700 645 2201
	Adhesive Tape	29638 333 0101

Attention: Observe MOS regulations 

Assembly:


- Disconnect the mains plug
- Loosen the rear of the cabinet and pull it backwards, unplug the connector of the subwoofer from the Click Fit board (option), remove the rear of the cabinet
- Undo the screws on the left/right of the chassis and pull the chassis to the back
- Loosen the securing bracket
- Remove the cover:
 - Detach catch (A) at the side from the chassis frame (Fig.1), disengage catches (B) and hinge away the cover
- Press the 2 catches of the AF Module on the bottom of the chassis together and remove the AF Module
- Pull off the earth ring from the tuner input of the IF Module
- Press the 2 catches of the IF Module on the bottom of the chassis together and remove the IF Module
- Attach the pieces of adhesive tape included in the delivery to the tuner and the electrolytic capacitor of the SAT Module (diagram)
- Plug the SAT Module into the multipoint connector between the AF and IF Amplifier, an earlier fitted Signal Module with Splitter must be removed
- Unplug the connector ST-AUX 1 from the AF Module and insert it into the SAT Module ST-AUX 1A (red, applicable only to TV sets with VGA interface)
- Connect the 3-core cable enclosed with the delivery to the SAT Module (ST-AUX 1B) and the AF Module (ST-AUX 1) (applicable only to TV sets with VGA interface)
- Connect the 6-core cable enclosed with the delivery to the SAT Module (ST-I2 S1) and the AF Module (ST-I2 S1)
- Refit the IF Module or insert the second SAT Module instead of the IF Module, attach the earth ring to the tuner input (the two cables enclosed are not needed)
- Insert the AF Module
- Lock in the securing bracket (take care of the cable layout)
- Insert the SAT cover into the cutout of the cover (only applicable to TV sets with Signal Module with Splitter)
- Break the prepunched cutout (C) for SAT input off the cover (Fig.1)
- Break the prepunched cutout (D) for the second SAT input off the cover of TV sets with two SAT Modules
- Attach the cover and lock it in
- Slide the chassis in and fasten it with the 2 screws (left/right)
- Plug the connector of the subwoofer into the Click Fit board (option) and refit the rear of the cabinet
- Close the TV set

Connect the mains plug and switch the TV set on

The TV set starts with ATS-Reset

Select the language / country. On confirmation of the country, the tuning system will start automatically.

Fig.1

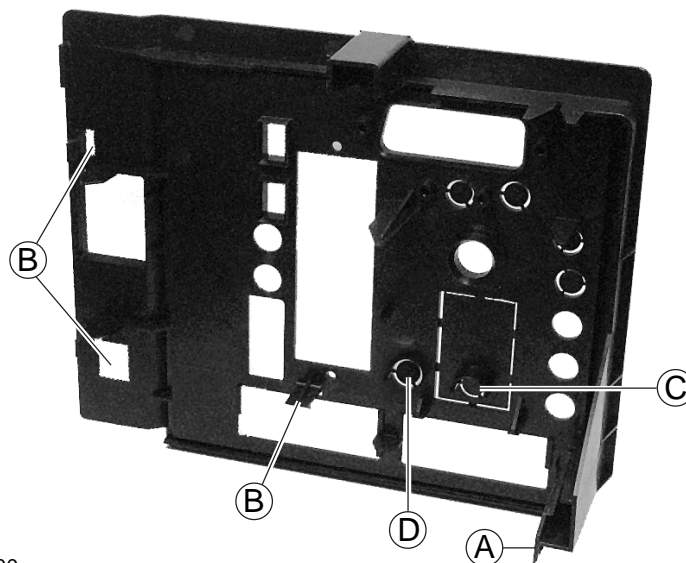

SAT-Baustein / SAT Module SER 300

