

D Montageanleitung

Modul SET PIP 6, Bestellnummer G.AE 7300

für TV-Chassis Digi Basic 3

bestehend aus:	PIP-Baustein	29504 206 0100
	SAT-Modul	29504 222 0100
	6-poliges Kabel	29210 236 0501
	3-poliges Kabel	29210 233 7201
	Montageanleitung	72010 025 0000
	Bedienungsanleitung (SER 300)	28017 942 0700

Achtung: MOS-Vorschriften beachten 

Montage:

- Netzstecker ziehen
- Gehäuserückwand lösen und nach hinten ziehen, Stecker des Subwoofers von "Click Fit"-Platte abziehen (optional), Rückwand abnehmen
- Schrauben links/rechts vom Chassis herausschrauben und Chassis nach hinten ziehen
- Haltebügel lösen
- Abdeckung abnehmen:
 - Seitlichen Rasthaken  am Chassisrahmen lösen (Fig.1), Rastnasen  ausrasten und Abdeckung wegklappen
 - 2 Rastnasen des NF-Bausteins an der Chassisunterseite zusammendrücken und NF-Baustein herausziehen
 - Massering vom Tunereingang des ZF-Bausteins abziehen
 - 2 Rastnasen des ZF-Bausteins an der Chassisunterseite zusammendrücken und ZF-Baustein herausziehen
 - PIP-Baustein auf Chassis stecken (ST-PI1 und ST-PI2)
 - SAT-Modul auf Steckerleiste zwischen NF- und ZF-Verstärker stecken
 - Stecker ST-AUX 1 vom NF-Baustein abziehen und auf SAT-Modul ST-AUX 1A (rot) stecken (nur bei Geräten mit VGA-Schnittstelle)
 - Beigelegtes 3-poliges Kabel auf SAT-Modul (ST-AUX 1B) und NF-Baustein (ST-AUX 1) stecken (nur bei Geräten mit VGA-Schnittstelle)
 - Beigelegtes 6-poliges Kabel auf SAT-Modul (ST-I2 S1) und NF-Baustein (ST-I2 S1) stecken
 - ZF-Baustein wieder einstecken, Massering über Tunereingang schieben
 - NF-Baustein einstecken
 - Haltebügel einrasten (auf Kabelverlegung achten)
 - Aus Abdeckung Durchbruch (Fig.1 ) ausbrechen, Abdeckung aufsetzen und einrasten
 - Chassis einschieben und mit den 2 Schrauben (links/rechts) festschrauben
 - Stecker des Subwoofers auf "Click Fit"-Platte stecken (optional) und Gehäuserückwand aufsetzen
 - Gerät schließen

Netzstecker einstecken und Gerät einschalten

Gerät startet mit ATS-Reset

Sprache / Land auswählen, nach Bestätigung des Landes startet der Suchlauf automatisch

PIP-Abgleich

- Gerät ausschalten
- PIP-Taste der Fernbedienung gedrückt halten und Gerät mit dem Netzschalter einschalten
- PIP-Bild erscheint auf dem Bildschirm
- Vertikale/horizontale Lage des PIP-Bildes mit den Tasten     einstellen
- Mit "OK" bestätigen

GB Fitting Instructions

Module SET PIP 6, Order Number G.AE 7300

for Digi Basic 3 TV chassis

consisting of:	PIP Module	29504 206 0100
	SAT Module	29504 222 0100
	Connecting Cable, 6-core	29210 236 0501
	Connecting Cable, 3-core	29210 233 7201
	Fitting Instructions	72010 025 0000
	Operating Instructions (SER 300)	28017 942 0700

Attention: Observe MOS regulations

Assembly:

- Disconnect the mains plug
- Loosen the rear of the cabinet and pull it backwards, unplug the connector of the subwoofer from the Click Fit board (option), remove the rear of the cabinet
- Undo the screws on the left/right of the chassis and pull the chassis to the back
- Loosen the securing bracket
- Remove the cover:
Detach catch (A) at the side from the chassis frame (Fig.1), disengage catches (B) and hinge away the cover
- Press the 2 catches of the AF Module on the bottom of the chassis together and pull the AF Module out
- Pull off the earth ring from the tuner input of the IF Module
- Press the 2 catches of the IF Module on the bottom of the chassis together and pull the IF Module out
- Attach the PIP Module to the chassis (ST-PI1 and ST-PI2)
- Plug the SAT Module into the multipoint connector between the AF and IF Amplifier
- Unplug connector ST-AUX 1 from the AF Module and insert it into the SAT Module ST-AUX 1A (red, applicable only to TV sets with VGA interface)
- Connect the 3-core cable enclosed with the delivery to the SAT Module (ST-AUX 1B) and the AF Module (ST-AUX 1) (applicable only to TV sets with VGA interface)
- Connect the 6-core cable enclosed with the delivery to the SAT Module (ST-I2 S1) and the AF Module (ST-I2 S1)
- Refit the IF Module, attach the earth ring to the tuner input
- Insert the AF Module
- Lock in the securing bracket (take care of the cable layout)
- Break the prepunched cutout (Fig.1 (C)) off the cover, attach the cover and lock it in
- Slide the chassis in and fasten it with the 2 screws (left/right)
- Plug the connector of the subwoofer into the Click Fit board (option) and refit the rear of the cabinet
- Close the TV set

Connect the mains plug and switch the TV set on


The TV starts with ATS-Reset

Select the language / country. On confirmation of the country, the tuning system will start automatically.

PIP Adjustment

- Switch the TV set off
- Press and hold the PIP button on the remote control handset and switch the TV set on with the mains switch
- The PIP appears on the screen
- Set the vertical/horizontal PIP position using the \blacktriangleright \blacktriangleleft \blacktriangleup \blacktriangledown buttons
- Confirm with "OK"

Fig.1

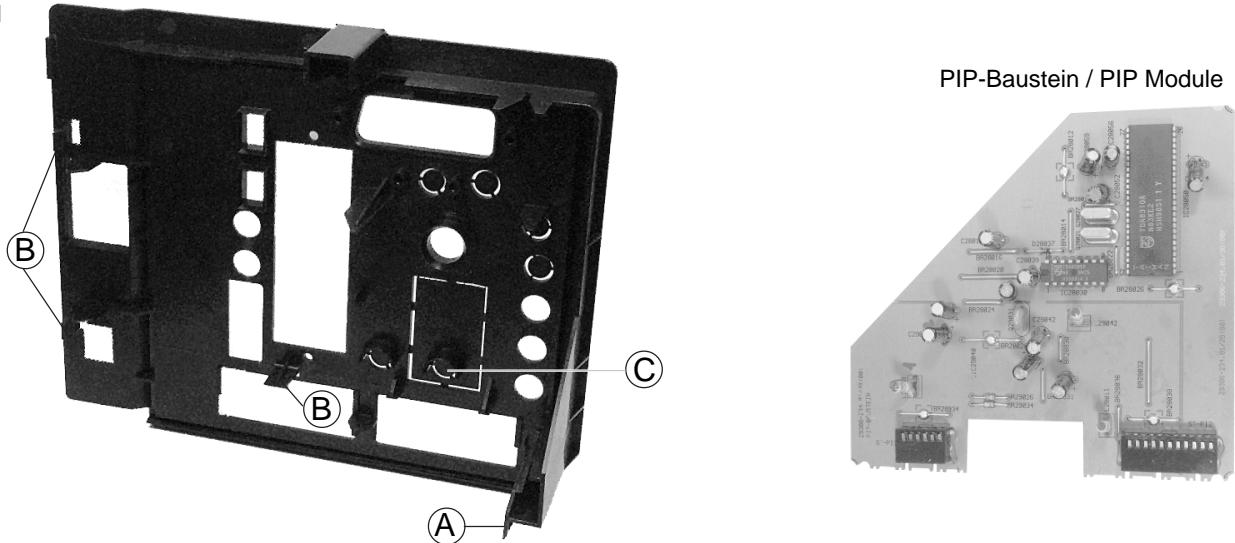

SAT-Modul / SAT Module
SER 300

